

# Profec Slangstos mässing 1/2" x 8 mm utvändig gänga x slangkoppling 30bar (0411756)



# TEKNISKA SPECIFIKATIONER

|                |                                |
|----------------|--------------------------------|
| Material       | mässing                        |
| Anslutning     | utvändig gänga x slangkoppling |
| Tryck          | 30 bar                         |
| Max temp.      | 120 °C                         |
| Storlek        | 1/2" x 8 mm                    |
| Max temperatur | 120 °C                         |
| Skruvnyckel    | 21                             |


## DIMENSIONER

|       |        |
|-------|--------|
| Dq-2  | 6.4 mm |
| F-1   | 10 mm  |
| L     | 38 mm  |
| Lb    | 38 mm  |
| Lq-2  | 15 mm  |
| Nq-2  | 3      |
| P-1   | 15 mm  |
| ØDi-1 | 15 mm  |

|       |        |
|-------|--------|
| ØDi-2 | 4.5 mm |
|-------|--------|

|       |       |
|-------|-------|
| ØDo-1 | 1/2 " |
|-------|-------|

|       |      |
|-------|------|
| ØDo-2 | 8 mm |
|-------|------|

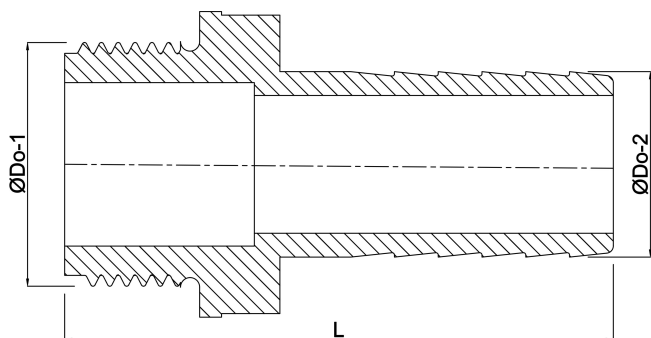

**Genererad den: 24/02/2026**

Bevo Nordic A/S  
Pakhusgården 54  
5000 Odense C  
Danmark  
+45 66 19 25 45  
[info@bevo.dk](mailto:info@bevo.dk)  
<http://www.bevo.com>