

Profec Kulventil PVC-U 25 mm limsocket 16bar 24- 240VAC/VDC grå type Safe med don J4C S20 (7018919)



TEKNISKA SPECIFIKATIONER

Färg	grå
Typ	Safe med don J4C S20
Material	PVC-U
Funktion	ställdon
Hus konstruktion	3-delt
Konvertertid	15 sek.
Materialhus	PVC-U
Packningsmaterial	hytrel/EPDM
Anslutning	limsockel
Volt	24-240VAC/VDC
Max temperatur	60 °C
Max omgivelsetemperatur	-10 - +60 °C
Tryck	16 bar
Storlek	25 mm

DIMENSIONER


Ct-1	230.5 mm
------	----------

Lb 112 mm

ØDf 20 mm

ØDi-1 25 mm

ØDi-2 25 mm

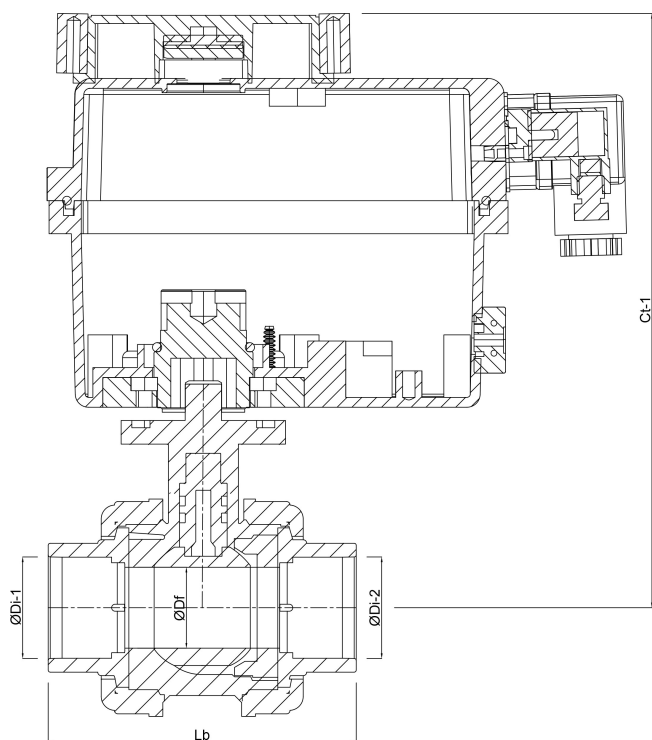

PRODUKTINFORMATION

Anslutning enligt DIN 43650

Genererad den: 23/02/2026

Bevo Nordic A/S
Pakhusgården 54
5000 Odense C

Danmark
+45 66 19 25 45
info@bevo.dk
<http://www.bevo.com>