

DAB jet-pump rostfritt stål 304 1" invändig gänga 8bar 6,6A 230VAC grön självsugande med tryckkontroll type JETINOX 132 Control D (7030932)



TEKNISKA SPECIFIKATIONER

Färg	grön
Material	rostfritt stål 304
Pump body	rostfritt stål 304
Material impeller 1	teknopolymer A
Modell	själv sugande med tryckkontroll
Anslutning	invändig gänga
Volt	230VAC
Max temperatur	35 °C
Minste mellantemperatur (kontinuerlig)	0 °C
Tryck	1 "
Max omgivningstemperatur	40 °C
Sug	1 "
Typ	JETINOX 132 Control D
Storlek	1"
Effekt	0.75 kW
MWC	48,3

Ampere	6,6 A
--------	-------

Max flow rate	4.8 m ³ /h
---------------	-----------------------

BEP Capacity	3.5
--------------	-----

BEP Head	33
----------	----

PORlh	37.5
-------	------

PORhh	29.8
-------	------

PORlq	2.5
-------	-----

PORhq	4.2
-------	-----

DIMENSIONER

Cb-1	98.5 mm
------	---------

Cb-1	144 mm
------	--------

Cl-1	122 mm
------	--------

Cr-1	87 mm
------	-------

Ct-1	98.5 mm
------	---------

G	111 mm
---	--------

H	197 mm
---	--------

H	197 mm
---	--------

L	424 mm
---	--------

L 440 mm

LM 424 mm




Mr 207 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

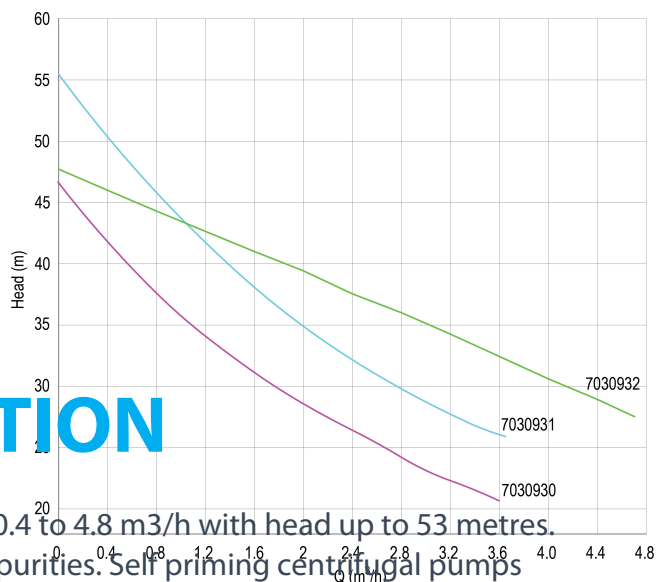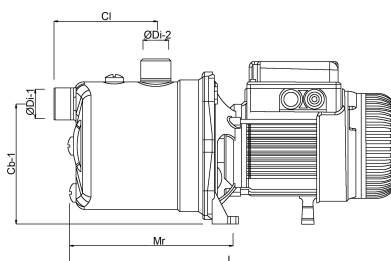

PRODUKTINFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres.

Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Genererad den: 24/02/2026

Bevo Nordic A/S
Pakhusgården 54
5000 Odense C
Danmark
+45 66 19 25 45

info@bevo.dk
<http://www.bevo.com>